

## AIR-50VIKA/M4-1/STARVIS

### Features

- ◆ Varifocal Weatherproof IR Camera
- ◆ 1/2.8" SONY 2.1MP Starvis Back-illuminated CMOS Sensor
- ◆ 14μ x 36pcs IR LED , IR Range 50M
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 2.8-12mm Manual zoom ICR Lens




**2 YEARS  
WARRANTY**

### Specifications

Model Name	AIR-50VIKA/M4-1/STARVIS
Image Device	1/2.8" SONY 2.1MP Starvis Back-illuminated CMOS Sensor
CMOS Sensor	IMX307
DSP Device	2441H
Picture Elements	1920(H)×1080(V) ,1080P
Min. Illumination	0.01Lux
TV System	PAL/NTSC
Lens Furnished	Built-in 2.8-12mm Manual zoom ICR Lens
Infrared Luminary	14μ x 36pcs IR LED
Illuminate Distance	50 M
Waterproofing Criterion	IP 66
Wavelength	850 nm
S/N Ratio	More than 41dB
Electronic Shutter	AUTO/1/50(1/60)-1/50,000sec
OSD Menu	Yes
D-WDR	Off/Auto/On
Noise Reduction	3DNR
BLC	AUTO
AWB	AUTO
Day&Night	EXT/B/W/Color/Auto
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms
Power Supply	DC12V±10%
Operation Temperature	-20℃ ~ +50℃
Dimension	Body : φ 97.3x176mm With Bracket: 298.2(L)x101.3(W)x97.3(H)
Weight	1500g

■ Size Chart

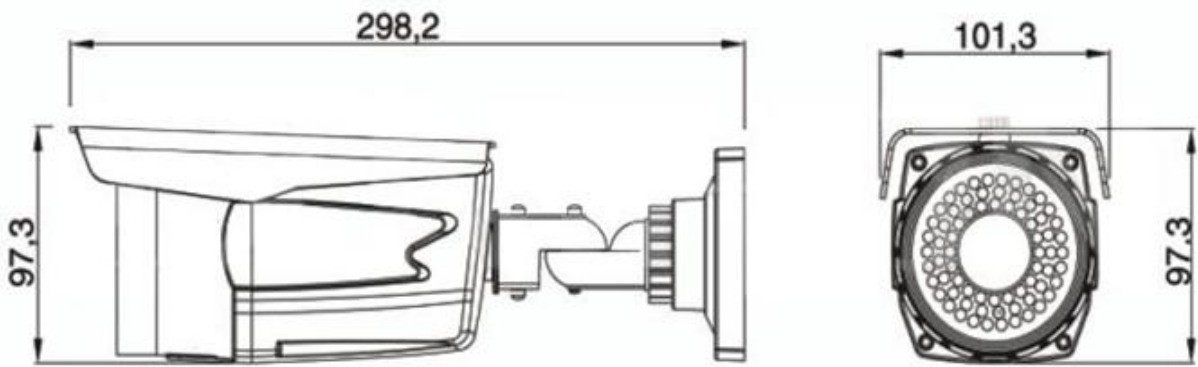

*Design and specifications are subject to change without notice.*